Ender-PLA


Easy Printing without Worry Choice

Easy Printing | Neat Winding | Printing Smoothly



Print without Warping, Easier to Print

Made of environmentally friendly PLA material, the printed model is low shrinkage and easy to print without warping.

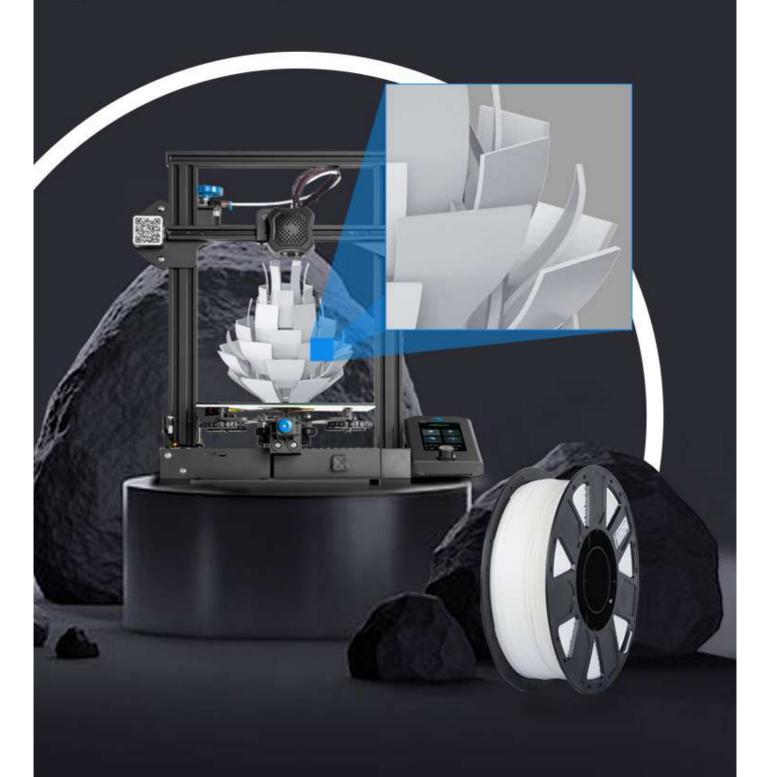


Neat Winding with Smooth Printing


Precise filament diameter control, EPC automatic winding arrangement, to ensure neat PLA filament, smoother feeding and printing. Same Diameter, Tangle-free, Tolerance ±0.03mm.



Flow Printing without Clogging

High-purity and impurity-free raw materials, the good fluidity enables the filament to be extruded evenly and smoothly during printing. No clogging to the nozzle, and improving the printing success rate.

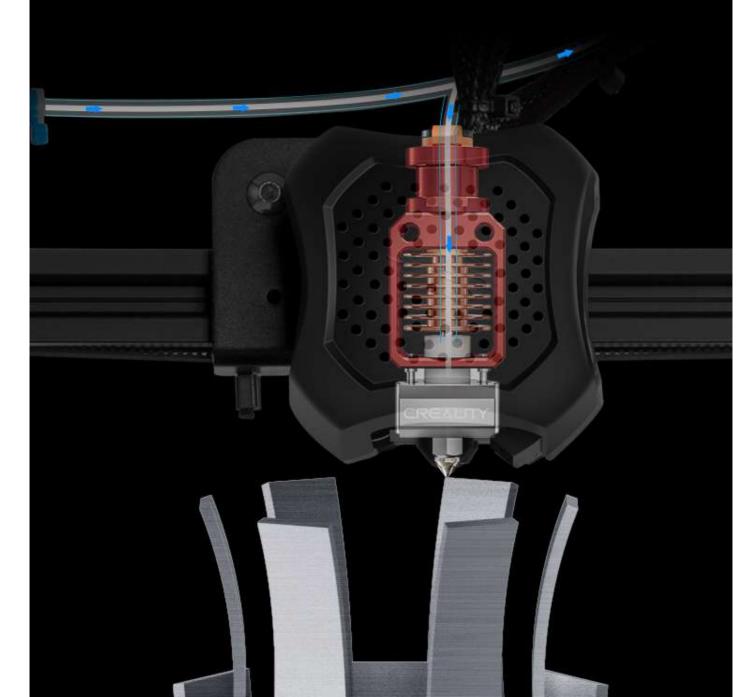


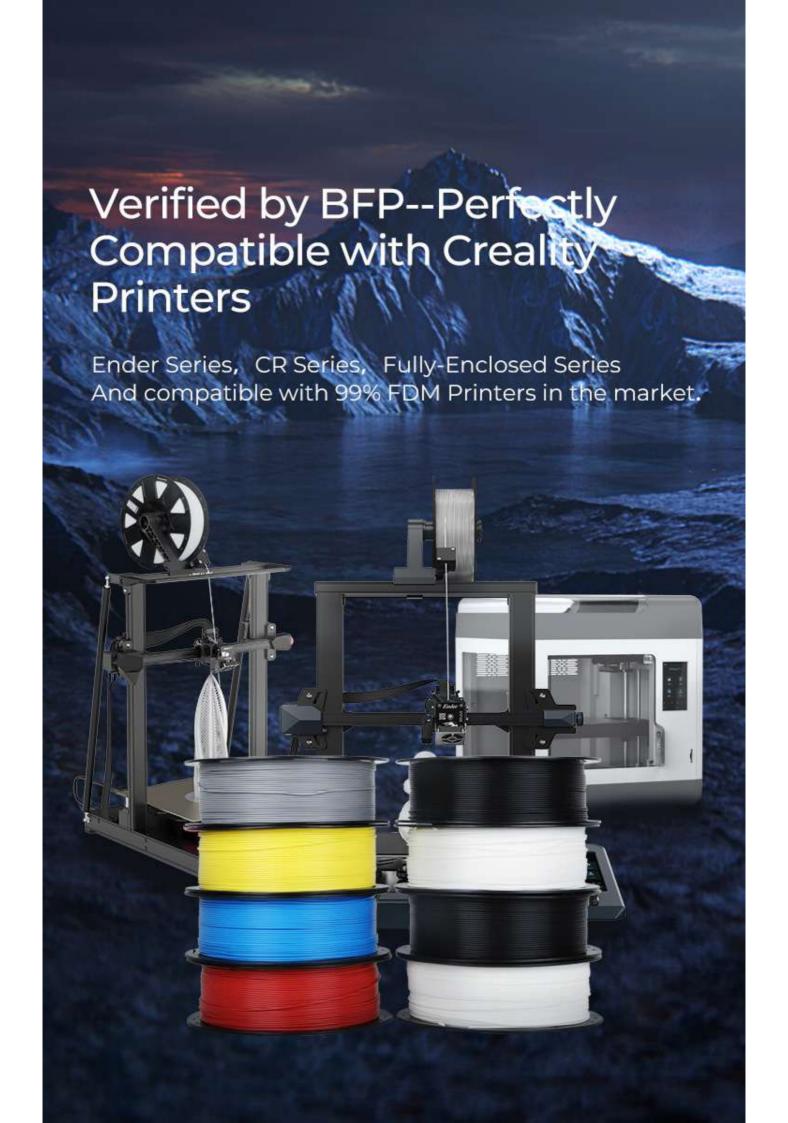

Multiple Color



Applications

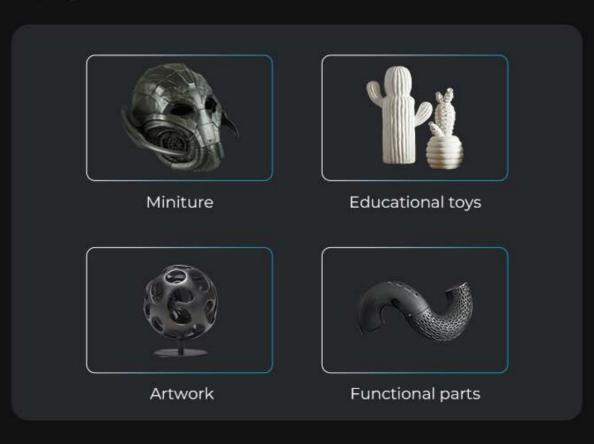

Packaging





Product Parameters

Product Name	Ender-PLA Filament
Density	1.25g/cm³
Tensile Strength	34MPa
Bending Strenght	77MPa
Impact Strength	73/ m²
Recommend Priting Temperature	190-230℃
Recommend Hotbed Temperature	no heating -60°C
Recommend Print Speed	40-80mm/s
Recommend Fan Speed	100%
Certification	RoHS,REACH,MSDS
Filament Diameter	1.75±0.03mm
Product Net Weight	1Kg/2.2lb
Product Gross Weight	1.29Kg/2.8Ib
Packing Size	210*210*70mm
Recommend Print Surface	Carborundum glass platform, PEI platform, Crepe tape, PVP glue