Consumer Enterprise

Language

GIGABYTE"

PRODUTOS ▼

SUPORTE

INSIGHT

NEWS

ONDE COMPRAR










Home > Placas-mãe > B760 AORUS ELITE AX

B760 AORUS ELITE AX (rev. 1.x)

_	"				
Intel [®] B760 C		Especificação	Suporte	Galeria de Imagens	·
 1. LGA1700 socket: Support for the 14th, 13th, and 12th Gene Intel[®] Core™, Pentium[®] Gold and Celeron[®] Processors* 2. L3 cache varies with CPU 					
	* Please refer to "CPU Support List" for more information.				
Chipset	1. Inte	el [®] B760 Express	Chipset		
Memória	1. Տսր 700 600	00(O.C.) / 6800(O	.C.) / 6600(.C.) / 5600(7400(O.C.) / 7200(O.C. (O.C.) / 6400(O.C.) / 620 (O.C.) / 5400(O.C.) / 520	00(O.C.)/



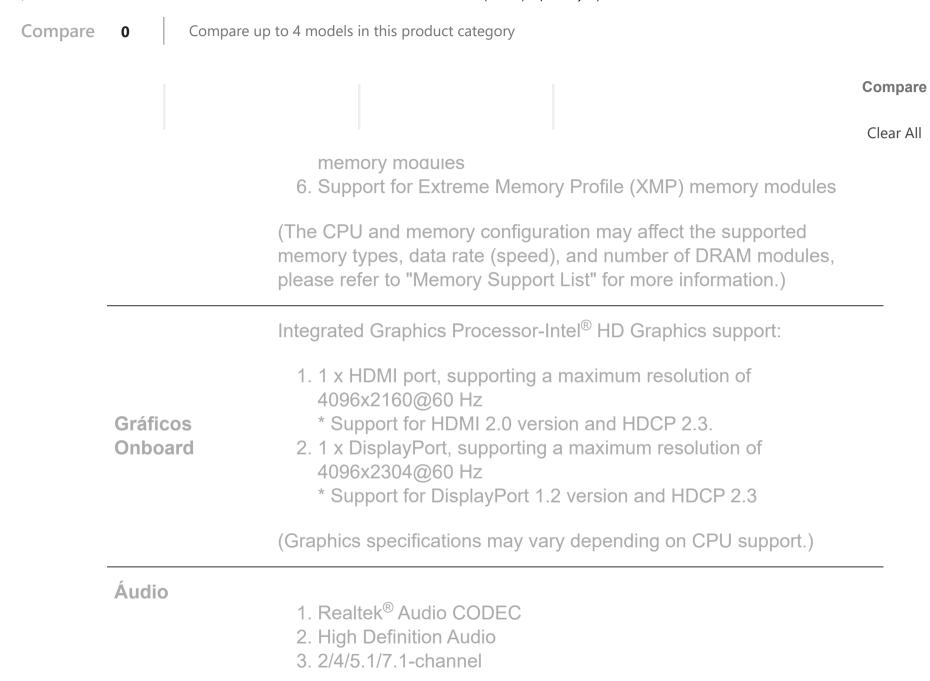



Compare 0 Compare up to 4 models in this product category

Clear All

Intel® Wi-Fi 6E AX211 (For PCB rev. 1.0)

- 1. WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands
- 2. BLUETOOTH 5.3
- 3. Support for 11ax 160MHz wireless standard and up to 2.4 Gbps data rate

Wireless Communication module

Realtek® Wi-Fi 6E RTL8852CE (For PCB rev. 1.1)

- 1. WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands
- 2. BLUETOOTH 5.3
- 3. Support for 11ax 160MHz wireless standard and up to 2.4 Gbps data rate

(Actual data rate may vary depending on environment and equipment.)

Slots de

CPU:




Compare up to 4 models in this product category Compare Clear All 1. 2 x PCI Express x16 slots, supporting PCIe 3.0 and running at x1 (PCIEX1 1, PCIEX1 2) CPU: 1. 1 x M.2 connector (Socket 3, M key, type 22110/2280 PCIe 4.0 x4/x2 SSD support) (M2A CPU) Chipset: Interface de **Armazenamento** 1. 2 x M.2 connectors (Socket 3, M key, type 22110/2280 PCIe 4.0 x4/x2 SSD support) (M2P SB, M2M SB) 2. 4 x SATA 6Gb/s connectors RAID 0, RAID 1, RAID 5, and RAID 10 support for SATA storage devices **USB** Chipset: 1. 2 x USB Type-C[®] ports, with USB 3.2 Gen 2 support (1 port on

This website uses cookies to provide you a more personalized and responsive service. By using this website you agree to our use of cookies. If you require more information or prefer not to accept cookies please visit our Privacy Policy.

the back panel, 1 port available through the internal USB header)



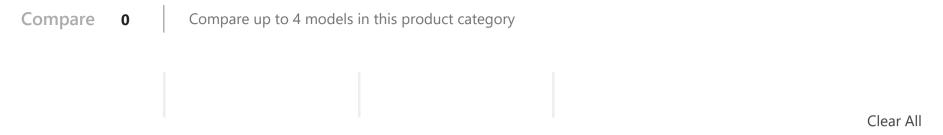

Chipset+2 USB 2.0 Hubs:

1. 8 x USB 2.0/1.1 ports (4 ports on the back panel, 4 ports available through the internal USB headers)

Conectores I/O

- 1. 1 x 24-pin ATX main power connector
- 2. 1 x 8-pin ATX 12V power connector
- 3. 1 x 4-pin ATX 12V power connector
- 4. 1 x CPU fan header
- 5. 1 x CPU fan/water cooling pump header
- 6. 3 x system fan headers
- 7. 1 x system fan/water cooling pump header
- 8. 2 x addressable LED strip headers
- 9. 2 x RGB LED strip headers
- 10. 3 x M.2 Socket 3 connectors
- 11. 4 x SATA 6Gb/s connectors
- 12. 1 x front panel header
- 13. 1 x front panel audio header
- 14. 1 x USB Type-C[®] header, with USB 3.2 Gen 2 support
- 15. 1 x USB 3.2 Gen 1 header



Compare up to 4 models in this product category Compare Clear All 1. 1 x USB Type-C[®] port, with USB 3.2 Gen 2 support 2. 1 x USB 3.2 Gen 2 Type-A port (red) 3. 4 x USB 3.2 Gen 1 ports 4. 4 x USB 2.0/1.1 ports Conectores 5. 2 x SMA antenna connectors (2T2R) **Painel Traseiro** 6. 1 x HDMI port 7. 1 x DisplayPort 8. 1 x RJ-45 port 9. 1 x optical S/PDIF Out connector 10. 2 x audio jacks Controlador I/O 1. iTE[®] I/O Controller Chip Monitoramento 1. Voltage detection H/W 2. Temperature detection 3. Fan speed detection



