


UX200 SE White

 thermaltake

PN: CL-P116-AL12SW-A

# UX 200 SE White


**ARGB** Lighting CPU Cooler





# UX 200 SE White

## ARGB Lighting CPU Cooler



### 產品規格：


Unit :mm

P/N	CL-P116-AL12SW-A
Compatibility (CPU Socket)	Intel LGA 1700/1200/1156/1155/1151/1150 AMD AM5/AM4/FM2/FM1/AM3+/AM3/AM2+/AM2
Heatsink Dimension	122 x 61 x 156.2 mm ( L x W x H)
Heatsink Material	Aluminum Fins Copper Heatpipes
Heatpipe	Φ6mm x 4 pcs
Fan Dimension	120 x 120 x 25 mm ( L x W x H)
Fan Quantity	1pcs
Fan Speed	PWM 800~1800 RPM
Rated Voltage	12V
Start Voltage	6.0 V
Rated Current	0.3 A
Power Input	4.32W
Air Flow.	62.72 CFM
Air Pressure.	1.47 mm-H <sub>2</sub> O
Acoustical Noise.	25.0 dBA
Life Time	30,000 hours
Pin Connect	5V RGB header 2510 - 4Pin
Cooling Power	170 W

## Features :

- Support MB RGB LED 5V sync, ASUS, GIGABYTE, MSI and ASROCK
- Build-In ARGB LEDs offer best lighting effect
- 4 x Ø6 mm high performance U-shape copper heatpipes support up to 170W
- 120mm Quiet-Fan With 8 LED lighting
- 9 high Air Flow blade design for high cooling performance
- Long life hydraulic bearing for reliable and silent operation
- Universal Intel/ AMD socket compatibility

## Dimension :

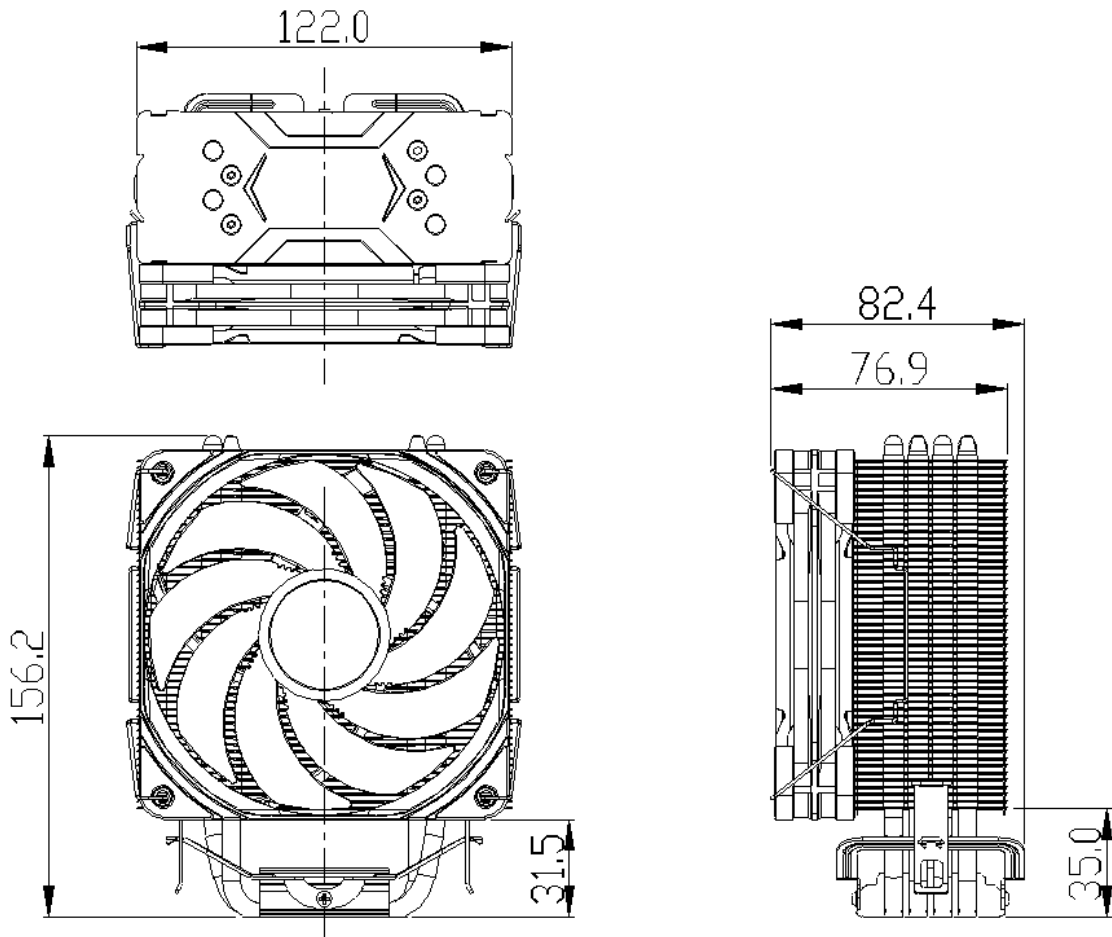

Angle View :



Top View



Bottom View



Front View



Fan



Universal Socket& Fan Clip



Heat-pipes Direct Touch Technology

**Features :**



**Performance optimized  
fin design**



**Fully Intel & AMD Socket  
Premium thermal grease**



**Application**

Sync 5V LED

**Support ASUS, MSI, GIGABYTE and ASROCK 5V RGB motherboard Sync.**

**\*Caution: the motherboard signal connector only supports 5V header.**



Aura Addressable Header



JRAINBOW Header



Addressable RGB LED Header



Digital Pin Header

UX200 SE White

 thermaltake

PN: CL-P116-AL12SW-A

# UX 200 SE White

**ARGB** Lighting CPU Cooler

