



SPECIFICATIONS


Efficiency Rating	80 PLUS Platinum (up to 92%)
Modular	Fully Modular
Fan Size	120 mm
Fan Bearing	Hydraulic Bearing
Dimensions (DxWxH)	150 x 150 x 86 mm / 5.9 x 5.9 x 3.38 inches
PFC Type	Active PFC
Input Voltage Range	100-240V~
Power Watt	850W
Power Excursion	200%
Input Frequency Range	50-60Hz
Protection	OCP, OTP, OPP, SCP, OVP, UVP, SIP, NLO
ATX (24 pin)	1
EPS (4+4 pin)	2
PCI-E 5.1 (16 pin)	1 (600W)
PCI-E (6+2 pin)	3
SATA (15 pin)	6
PERIPHERAL (4 pin)	2

FEATURES



EMBOSSED JACKET CABLE

The embossed cables are exceptionally flexible for easy routing and cable management, while also offering superior durability and a premium look.









DUAL COLOR 12V-2x6 CONNECTOR

With its vibrant yellow connector, you can easily see if the cable is fully plugged in, which helps guarantee a secure connection.





POWER OUTPUT

AC INPUT	100-240V~,50~60Hz,10A Max				
DC output	+5V	+3.3V	+12V	-12V	+5Vsb
	20.0A	20.0A	70.8A	0.3A	2.5A
	100W		849.6W	3.6W	12.5W
Total power	850W				

CONNECTORS

					
Motherboard (24 pin)	CPU (8 pin / 4+4 pin)	PCIe 5.1 (12+4 pin)	PCIe (6+2pin)	SATA	Peripheral (4 pin)
1	2	1	3	6	2

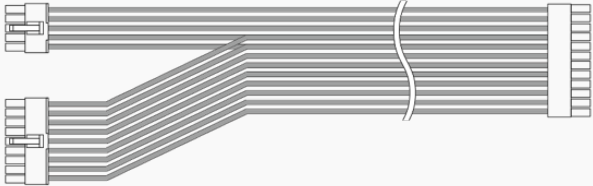CABLES

Amount / Type	Length (mm)	Diagram
1 x	600	
2 x	650	
1 x	600	
3 x	600	
2 x	450 120 120 120	